

Proceeding Book



GO GREEN2015 INTERNATIONAL POSTGRADUATE CONFERENCE ON GLOBAL GREEN ISSUES

"Incorporating Green Approaches for Resilient Future"

7 - 8 OCTOBER 2015 | Dewan Kuliah Al-Khawarizmi

Universiti Teknologi MARA, Cawangan Perak
Kampus Seri Iskandar
32610 Seri Iskandar
Perak, Darul Ridzuan, MALAYSIA
Website: www.perak.uitm.edu.my/gogreen2015/
Email: gogreen2015@perak.uitm.edu.my



UNIVERSITI
TEKNOLOGI
MARA



Fakulti Saizina Perancangan Dan Ukur
Faculty of Architecture, Planning And Surveying



9789675741357

INTERNATIONAL POSTGRADUATE CONFERENCE ON
GLOBAL GREEN ISSUES

GO GREEN2015

‘Incorporating Green Approaches for Resilient Future’

7-8 OCTOBER 2015
Dewan Kuliah Al-Khwarizmi
Universiti Teknologi MARA Cawangan Perak

ISBN 978 – 967 -5741-35-7
eISBN 978 – 967 -5741-36-4

copyright
Fakulti Senibina, Perancangan & Ukur,
Universiti Teknologi MARA Cawangan Perak,
2015

ORGANISED BY
Fakulti Senibina, Perancangan & Ukur
Universiti Teknologi MARA Cawangan Perak
Kampus Seri Iskandar
32610 Seri Iskandar,
Perak Darul Ridzuan, MALAYSIA
Tel: +605 374 2000
Fax: +605 374 2244

INDEX

		Page No.
Keynote Paper		
	<i>Ken Yeang Practice Report</i>	i
	Key Yeang	
SECTION I: GREEN DESIGN CONCEPT		
Paper ID	Title of the Paper and Authors	
GR1001	<i>The Composition Of Usability Evaluation In Assessing Quality of the Display Case Lighting</i> Siti Norsazlina Haron, Norashikin Abdul Karim, Afzanizam Muhammad, Anuar Talib , Md Yusof Hamid	1
GR1002	<i>Usability Evaluation for Hospital Building Quality In-Use</i> Siti Norsazlina Haron, Md Yusof Hamid , Yuhainis Abdul Talib	7
GR1003	<i>The Green Adaptive Reuse of Historical Buildings</i> Kartina Alauddin, Mohd Fisal Ishak, Noorzalifah Mohamed	14
GR1004	<i>Industrial Building System; Does it good for sustainable building?</i> S.Roshanfekar, N.M Tawil, N.A. Goh	19
GR1011	<i>Book Transit Shelter : A Method in Developing a Zero-Waste Environment and Healthy Campus Community</i> Muhammad Naim Mahyuddin, Hafizah Mohd Latif, Muhammad Redza Rosman, Nor Sahidah Samsudin, Rafizah Mohamed Nordin	22
GR1015	<i>Green Concepts Through Shape-Grammar – The Language Of Intermediate Spaces In Traditional Malay Houses</i> Suzana Said, M. Sabrizaa Abdul Rashid, Rosmawati Mohamed, Neta Suredah Baharum, Izatul Asyikin Nordin	27
GR1017	<i>Characterization of Lime Plaster of Ipoh Royal Club for Conservation Purpose</i> Farah Reeza Abdul Razak, Siti Norlizaiha Harun	32
GR1018	<i>An Overview On The Typology Of Shophouses' Façade At The Heritage Area in Ipoh City</i> Wan Nordiana Wan Ali, Nurul Huda Abdul Hadi, Noor Rizallinda Ishak	38
GR1019	<i>Sustainability Of Building Elements In Bidayuh Traditional Longhouse Construction</i> Janet Victoria, Siti Akhtar Mahayuddin, Wan Akmal Zahri Wan Zaharuddin, Siti Norlizaiha Harun, Balkhiz Ismail, Noorsaidi Mahat	45

GR1021	<i>Ephemeral Architecture: In Between Permanence and Impermanence towards Sustainable Architecture.</i>	51
	Sayed Muhammad Aiman Sayed Abul Khair, Ismail Samsuddin	
GR1022	<i>In Search of Malay Landscape Design: Characteristic and Identification of Traditional Landscape at Sungai Perak</i>	58
	Mohd Khazli Aswad Khalid, Mohd Sabrizaa Abd Rashid ,Ahmad Zamil Zakaria	

SECTION II: GREEN TECHNOLOGY

Paper ID	Title of the Paper and Authors	Page No.
GR2001	<i>New Environmentally Lightweight Building Materials from Hybrid Inorganic Polymer-Wood Particles</i>	66
	Siti Noorbaini Sarmin	
GR2004	<i>Hybrid Technology for the use of Solar Energy: The Challenge towards Green Energy</i>	72
	S. I. Hossain, M. R. Al-Mamun, S. Sikdar, M. Al-Amin, S. C. Majumder, M. R. Hasan, M. Z. H. Khan	
GR2006	<i>Waste Management Practices and Recycling Intention among Undergraduates Students in Higher Learning Institution</i>	79
	Siti Fahazarina Hazudin, Anis Barieyah Mat Bahari, Alia Ezrie Ashiqin Jamaludin	
GR2007	<i>Thioflavin Dye Degradation by Using Magnetic Nanoparticles Augmented Polyvinylidene Fluoride (PVDF) Microcapsules</i>	83
	Mohamed Syazwan Osman, KaMan Kong, Boon Seng Ooi, Bassim H. Hameed, Jit Kang Lim	
GR2013	<i>Concrete Compressive Strength Development when Polyethylene Terephthalate Partially Replaces Sand</i>	87
	Muhammad Redza Rosman, Norishahaini Mohamed Ishak	
GR2015	<i>Evaluation of Laser-Printed Paper Deinking Quality Facilitate By Lipase and Esterase Enzymes</i>	95
	Nurul Shafika Azmi, Nik Raikhan Nik Him	
GR2016	<i>Green Approach in Road Construction</i>	102
	Suhaila Ali, Nurul Fatihah Yahaya , Norbaizura Abu Bakar, Mohd Hafiz Saberi, Norhafizah Yusop, Farhan Md Dahlan	

GR2017	<i>Establishing a Strategic Framework of Green Procurement for the Malaysian Construction Industry</i> MohdSallehuddin Mat Noor , Fadzil Hassan	108
GR2019	<i>Environmental Psychology: An Analysis on Lighting Efficiency of the Architecture Studio in UiTM Perak</i> Fazidah Hanim Husain, Zafuan Husri ,Farhah Amani	113
GR2020	<i>Effect of Kenaf Fibre and Rice Husk Incorporation on Melt Flow and Mechanical Properties of Calcium Carbonate/Polypropylene Hybrid Composite</i> Mohd Muizz Fahimi Mohamed, Rahmah Mohamed	119
GR2027	<i>Surfacing Effects on Thermal Condition in Urban Open Space</i> Liyana Ahmad Bazuli, Azhan Abdul Aziz	124
GR2028	<i>Impact Of Urban Block Configuration And Direction On Urban Temperature Increase In Hot, Humid Regions</i> Lin Yola, Ho Chin Siong	131
GR2029	<i>Modular Construction System in Malaysia: Issues for Research in Sustaining an Affordable Home Projects</i> Salmiah Aziz, Mohd Rofdzi Abdullah	140
GR2030	<i>Review on Indoor Environment Quality Parameters Towards Healthier Green Buildings in Malaysia</i> Fadhilah Che Aziz, Md Yusof Hamid	153
GR2032	<i>Green Solar Dehydrator</i> A. N. Alias, M. H. Khalid, N. F. M. Sahapini, Z. Mahfodz, F. Abdullah, R. Julius, M. A. Yahya, F. Fariesha	161
GR2035	<i>Solar Energy: Dilemma and the Way Forward</i> Norhafizah Yusop, Norbaizura Abu Bakar, Suhaila Ali, Mohd Hafiz Saberi, Mohamad Akmal Mohamad Najib, Noor Zawani Yusop	166
GR2037	<i>An Overall Thermal Transfer Value (OTTV) – Based Approach in Analysing the Energy Efficiency of Buildings: A Review</i> Afiqah Ahamad, Wan Abdullah Wan Alwi, Azman Zainoabidin	172
GR2040	<i>Natural Fibre as Fibrous Reinforced in Polymer Modified Mortar: A Review</i> Azamuddin Husin, Mahyuddin Ramli, Cheah Chee Ban	177
GR2042	<i>Flame Retardancy Study Of Recycled Polymeric Foam Filled Composite Building Material.</i> Syed Anas Syed Mustafa, Rahmah Mohamed, Lily Soraya Amerudin	184

GR2044	<i>Improving Overall Thermal Transfer Value of Office Tower Building in Malaysia. Case Study : Ministry of Women Family and Community Development, Lot 4G11, Putrajaya</i> Azman Zainoabidin, Amirul Amin Ismail	191
GR2045	<i>Towards Green Roads in Malaysia: Review of Road Characteristics Effects On Road Surrounding Microclimates with Respect to Roadside Trees</i> Nasibeh FaghihMirzaei, Sharifah Fairuz Syed Fadzil, Aldrin Abdullah, Nooriati Binti Taib, Reza Esmaeilifar	200
GR2049	<i>Carbon Footprint Calculator for Children</i> Romiza Md Nor, Haleeda Azwa Abdul Hadi	208

SECTION III: GREEN MANAGEMENT

Paper ID	Title of the Paper and Authors	Page No.
GR3001	<i>Project Manager Success Factors In Managing Green Buildings In Malaysia : Knowledge and Skills</i> Asniza Hamimi Abdul Tharim, Aifa Syazwani Zainudin, Nur'Ain Ismail, Thuraiya Mohd, Noor Aileen Ibrahim	213
GR3002	<i>Role of Real Estate Valuation Surveyors in the Malaysian National Taxation</i> Mohd Hasrol Haffiz Aliasak , Mohd Farid Bin Sa'ad	221
GR3003	<i>An Overview of the Challenges in Malaysian Green Construction</i> Asniza Hamimi Abdul Tharim, Aifa Syazwani Zainudin, Noraidawati Jaffar	228
GR3004	<i>Overview of Lean Issues in Managing the Green Construction Project</i> Wan Nur Syazwani Wan Mohammad, Mohd Rofdzi Abdullah	235
GR3005	<i>Identifying the Challenges in Obtaining Green Building Index (GBI) Certification In Construction Industry</i> Izatul Farrita Mohd Kamar, Lilawati Ab Wahab, Nor Suzila Lop, Noor Aishah Mohammad Hamdan	241
GR3006	<i>Stakeholder's Pressures on the Firm's Environmental Strategy in Malaysia</i> Rohati Shafie, Loke Siew Phaik	247
GR3007	<i>Key Success Factors of Green Building Implementation in Malaysia Construction Industry</i> Nor Suzila Lop, Asmalia Che Ahmad, Nik Aqlima Diyana Nik Zulkipli	254

GR3008	<i>The Effectiveness of the Implementation of QE/5S towards Quality Environment at Workplace</i> Norhaslina Jumadi, Nurul Sahida Fauzi, Lizawati Abdullah, Wan Nur Syazwani Wan Mohammad, Johana Yusof	363
GR3009	<i>Outsourcing Property Management Perspective: Universities in the District of Perak Tengah</i> Nurul Sahida Fauzi, Noratikah Kamarudin, Siti Nadiah Mohd Ali, Nor Aini Salleh, Noraini Johari	268
GR3010	<i>The Facilities Management Standard Service Category</i> Zuraihana Ahmad Zawawi, Wan Samsul Zamani Wan Hamdan, Nur Azfahani Ahmad, Nurul Fadzila Zahari	273
GR3011	<i>The Enhancement Criteria of Green Building Implementation For Property Development in Perak, Malaysia – Valuers’ Perspective</i> Roshdi Sabu, Hayroman Ahmad, Lizawati Abdullah	279
GR3014	<i>Preliminary Study on Waste Management for Implementation of Green Highway</i> Asmalia Che Ahmad, Nur Illiana Husin, Abdul Muhaimin Ab Wahid, Syahrul Nizam Kamaruzzaman	286
GR3016	<i>Critical Motivation Factors among Project Managers to Achieve Successful Project in Malaysian Construction Industry</i> Farhan Md Dahlan, Muhammad Amirul Fahme Ahmad, Siti Nadiah Mohd Ali, Siti Sarah Mat Isa, Norbaizura Abu Bakar	293
GR3018	<i>The Contractor’s Attributes For The Construction Project Success</i> Mohd Hafiz Saberi, Norbaizura Abu Bakar, Norhafizah Yusop, Suhaila Ali, Mohd Fisal Ishak, Farhan Md Dahlan, Noraini Abdul Rani	300
GR3020	<i>Review on Malaysia’s GreenRE in Comparison with Singapore’s GreenMark and UK’s BREEAM</i> Halmi Zainol, Fadhilah Che Aziz, Suharto Teriman, Haryati Mohd Isa, Muhamad Asri Abdullah Kamar	305
GR3021	<i>Risk Management Plan (RMP); Implementation and Challenges towards Sustainability and Green Concept for Public Projects in Terengganu</i> Yuhainis Abdul Talib, Siti Nirwana Mat Usof, Kharizam Ismail	311
GR3023	<i>Imperfection Of Tender Document: A Solution Towards Sustainable Construction Practice In Malaysia</i> Mohd Esham Mamat, Shahela Mamter, Mohammad Sani Mat Hussein, Norazlin Mat Salleh	318

GR3024	<i>Benefits of Green Building from Client's Perspective</i> Norazlin Mat Salleh, Nik Noor Hazleeda Baharuddin, Shahela Mamter, Mohd Esham Mamat	322
GR3025	<i>Green Material Procurement Implementation Towards The Green Buildings</i> Shahela Mamter, Siti Rohayu Jusoh, Mohd Esham Mamat, Norazlin Mat Salleh	328
GR3026	<i>A Review Of Ex-Mining Land Reclamation as Construction Project Activities: Focusing In City Of Ipoh</i> Mohd Najib Abd Rashid, Hayroman Ahmad, Siti Jamiah Tun Jamil, Noor Azam Yahaya, Mohamad Hamdan Othman	333
GR3027	<i>Repair and Maintenance Works For Low Cost Housing; Issues And Solution</i> Yuhainis Abdul Talib, Amirul Helmi Abdul Malik , Siti Norsazlina Haron	340
GR3028	<i>An Overview of Time and Cost in Arbitration for Construction Projects</i> Azira Ibrahim, Zulhabri Ismail, Thuraiya Mohd, Ida Nianti Mohd Zin	347

SECTION IV: GREEN CULTURE

Paper ID	Title of the Paper and Authors	Page No.
GR4002	<i>An Assessment of Carbon Footprint at UiTM Seri Iskandar Perak, Malaysia</i> Nor Izana Mohd Shobri, Wan Noor Anira Wan Ali @ Yaacob, Norizan Mt Akhir, Siti Rasidah Md Sakip	352
GR4005	<i>Eco-Friendly Food Packaging: Young Consumer 's Perception & Practice</i> Norsyamira Shahrin , Rabiatal Adawiyah Abd Rahman, Noorliza Zainol, Noor Saliza Salmi, Mohd Faisal Abdul Wahab	357
GR4006	<i>Ethico-Legal Issues In The Medical Profession: A Case Study Of Nursing Profession In The World</i> Lateef Wale Adeyemo, Syahirah Abdul Sukor, Amalina Ahmad Tajudin, Ali H Ali Beltamer	364
GR4008	<i>Green Perception and Behavior among Students at UiTM Melaka</i> Siti Norashikin Bashirun, Nurldayu Badrolhisham, Farah Shazlin Johari, Nurhafizah Mohd Zolkapli, Nor Maslia Rasli Samudin, NurFaithzah Jamian	373

GR4009	<i>Geographical Information Systems (GIS) Approach For Mapping The Aboriginal Children Malnutrition Growth : A Case In Kemar, Perak</i> Haslina Hashim, Izrahayu Che Hashim, Suzanah Abdullah, Fadhilah Md Isa, Noorfatekah Talib	378
GR4010	<i>A Preliminary Study of Cinemagraph as A Tool In Enhancing Public Service Announcement (PSA) On Smoking Habit Issue</i> Fahmi Samsudin, Rosita Mohd Tajuddin, Nik Ridzuan NikYusoff	388
GR4011	<i>Green Branding: The Effect of Green Trust towards Brand Loyalty of the Five-Star Hotel Guest</i> Muhd Nabil Hanif Hassim , Mohd Raziff Jamaluddin	394
GR4014	<i>Students' Knowledge in the Waqf Land Concept</i> Siti Nadiyah Mohd Ali, Rashidah Paujah Ismail , Abd. Halim Mohd Noor, Nurul Sahida Fauzi, Nor Nazihah bt Chuweni, Farhan Md Dahlan	400
GR4016	<i>The Awareness of Generation 'Y' on Green Building Development in Malaysia</i> Syarifah Nur Nazihah Syed Jamalulil, Haryati Mohd Isa, Nurul Huda Ahmad	405

SECTION V: GREEN ENVIRONMENT

Paper ID	Title of the Paper and Authors	Page No.
GR5001	<i>A Conceptual Study of Connectivity Elements Towards Successful Green Network</i> Nor Hamizah Abdul Hamid, Muhamad Ezran Zainal Abdullah, Nik Hanita Nik Mohamad	411
GR5006	<i>Sustainable Indicator for Feature Attributes Assessment of Urban Green Space</i> Rabi'ah Ahmad , Abdul Nassir Matori	417
GR5012	<i>Exploring the Relationship between Community Happiness and Environmental Setting</i> Siti Rasidah Md Sakip, Khalilah Hassan, Azran Mansor	425
GR5013	<i>The Potential of Lake in Generating the Urban Community Development. Case Study: Putrajaya Lake, Federal of Putrajaya.</i> Wan Noor Anira Wan Ali @ Yaacob, Norhafizah Abdul Rahman, Marina Abdullah, Nor Izana Mohd Shobri	433

GR5019	<i>Gis-Based Land Suitability Analysis Using AHP For Public Parks Planning In Kota Bharu, Kelantan</i> Khalilah Hassan, Izrahayu Che Hashim, Siti Syamimi Omar	439
GR5021	<i>Generating of Cotidal Dataset by Spatial Interpolation Techniques</i> Khadijah Sahdan, Syed Ahmad Qusoiri Syed Abdul Karim, Othman Mohd Yusof	446
GR5023	<i>Multiple Regeneration of Clinacanthusnutans Nodal Explants by using 6-Benzylaminopurine (BAP) Hormone</i> Siti Zulaiha Ghazali, Saiyidah Nafisah Hashim	451
GR5026	<i>Biodegradation of Petroleum Oil by using Isolated Penicillium sp.</i> Nabilah Razak, Saiyidah Nafisah Hashim, Chia Chay Tay	455
GR5030	<i>Students Awareness on Environmental Quality in Term of Daily Life Routine</i> Noorlida Daud, Wan Noor Anira Wan Ali @ Yaacob, Anwar Fikri Abdullah	460

EDITORIAL BOARD

Chief Editor

Dr. Atikah Fukaihah Amir

Language Editors:

Jeyamahla Veeravagu

NoorAileen Ibrahim

Nur Fatima Wahida Mohd Nasir

Noraini Johari

Nurul Ain Hasni

Mohamad Syafiq Ya Shak

Wan Faridatul Akma Wan Mohd Rashdi

Zarlina Mohd Zamari

BOARD OF REVIEWER

Head:

Assoc. Prof. Dr. Mohd Sabrizaa Abd Rashid

Research Area:

Green Design Concept	Assoc. Prof. Dr. Mohd Sabrizaa Abd Rashid
Green Technology	Dr. Azhan Abdul Aziz
Green Management	Dr. Ida Nianti Mohd Zain
	Dr. Sr. Hajah Nor Aini Salleh
Green Culture	Dr. Lilawati Ab Wahab
Green Environment	Dr. Suharto Teriman

Reviewers:

Assoc. Prof. Dr. Ahmad Faisal Alias, UiTM Cawangan Perak
Assoc. Prof. Dr. Halmi Zainol, UiTM Cawangan Perak
Assoc. Prof. Dr. Ismail Samsuddin, UiTM Cawangan Perak
Dr. Anis Sazira Bakri, UiTM Cawangan Shah Alam
Dr. Asmat Ismail, UiTM Cawangan Perak
Dr. Asmalia Che Ahmad, UiTM Cawangan Perak
Dr. Hj Ashrof Zainuddin, UiTM Cawangan Perak
Dr. Atikah Fukaihah Amir, UiTM Cawangan Perak
Dr. Fadzil Mat Yassin, UiTM Cawangan Perak
Dr. Haryati Mat Isa, UiTM Cawangan Perak
Dr. Hayroman Ahmad, UiTM Cawangan Perak
Dr. Kharizam Ismail, UiTM Cawangan Perak
Dr. Kartina Alauddin, UiTM Cawangan Perak
Dr. Kushairi Rashid, UiTM Cawangan Perak
Dr. Mahanim Hanid, University of Malaya, Kuala Lumpur
Dr. Muhamad Asri Abdullah Kamar, UiTM Cawangan Perak
Dr. Mohd Fadzil Abdul Rashid, UiTM Cawangan Perak
Dr. Mohd Hasrol Haffiz Aliasak, UiTM Cawangan Perak
Dr. Mohamad Mohd Derus, UiTM Cawangan Perak
Dr. Norhasandi Mat, UiTM Cawangan Perak
Dr. Norhafizah Abdul Rahman, UiTM Cawangan Perak
Dr. Nooriha Mansoor, UiTM Cawangan Perak
Dr. Sallehan Ismail, UiTM Cawangan Perak
Dr. Suzana Said, UiTM Cawangan Perak
Dr. Siti Rasidah Md Sakip, UiTM Cawangan Perak
Dr. Thuraiya Mohd, UiTM Cawangan Perak
Dr. Yuhainis Abdul Talib, UiTM Cawangan Perak

Improving Overall Thermal Transfer Value of Office Tower Building in Malaysia. Case Study: Ministry of Women Family and Community Development, Lot 4G11, Putrajaya

Azman Zainonabidin¹, Amirul Amin Ismail¹

¹Department of Architecture, Faculty of Architecture, Planning and Surveying, Universiti Teknologi MARA (Perak), Malaysia,
Email: azman906@perak.uitm.edu.my

Abstract

This paper presents the Overall Thermal Transfer Value (OTTV) and the energy consumption of air-conditioned office building in Malaysia. The study have been conducted to investigate the OTTV of Ministry of Women Family and Community Development's office block at Lot 4G11, Putrajaya. OTTV calculation, energy consumption and effect of the building parameters on energy consumption have been investigated. OTTV formula in MS1525 and Green Building Index (GBI) rating tool have been used for the OTTV calculation. The study shown that the OTTV of the Lot 4G11 is more than 70W/m². In order to comply with MS1525, where the minimum OTTV shall be less than 50W/m², improvement of the building envelope have been proposed, and the OTTV have been reduced below 50W/m². Since the Government has set that all government buildings in Putrajaya shall be GBI certified, further improvement of building envelope have been made in order to achieve OTTV for Platinum certification. It is found that improving the Window to Wall Ratio (WWR), Shading Coefficient (SC) and U-value for glazing will further reduce the OTTV and improve the energy efficiency of the Lot 4G11. Detailed calculations have been conducted to compare the results in between Building Baseline, MS1525 and Platinum Design.

Keywords: overall thermal transfer value, green building index, energy efficiency

1.0 Introduction

In November 9th2014, the Prime Minister's Department Complex, also known as *Perdana Putra* had received Green Building Index (GBI) Platinum Certification. *Perdana Putra* is the first successful large-scale upgrading of an existing building into the most energy-efficiency building in Malaysia, and has been categorized as a high-performance green building. Based on that achievement, the Government would like to see the entire city of Putrajaya transformed into a green, smart and connected city that will showcase our nation's economic and technological advancements. The Low Energy Office (LEO) of the Ministry of Energy, Water and Communications was completed in September 2004. This building is a new landmark to our achievement in green building as this office is the most energy efficient building in Malaysia with the OTTV score of 31.4 W/m². There was a key initiative made by the Government to turn this into a reality by appointing the specialist consultants to conduct a more holistic approach of GBI assessment into the government office complexes in Putrajaya. Among the important task conducted by the specialist consultant is to carry out an assessment of the current building envelope which contribute to OTTV. The building envelope is an essential element in building components. It does not merely protects the internal spaces but also from natural elements such as rain, sun and wind. It can be likened to an environmental filter as it sieves and intermediates with the external climate to create comfortable internal climate. Apart from acting as an environmental filter, wall envelope is a manifestation and expression of architectural thoughts, aspiration and ideas (Ibrahim, Ahmed & Ahmed, 2004). The building envelope is the interface between the interior of the building and the outdoor environment, including the foundation, roof, walls, doors and windows. By acting as a thermal barrier, the building envelope plays an important role in regulating interior temperatures and helps to determine the amount of energy required to maintain thermal comfort. Minimizing heat transfer through the building envelope is crucial for reducing the need for space heating and cooling. (<http://www.energyland.emsd.gov>, 2015). The use of air conditioning takes a large proportion of total electricity consumption in Hong Kong. Air-conditioning systems attribute about 30% of the total electricity consumption in Hong Kong. Due to increasing population and development, the energy consumption of air conditioning systems will likely continue to grow continuously (<http://www.energyland.emsd.gov>, 2015). Meanwhile in Malaysia, air-conditioning in typical office building could contribute more than 60% of total energy usage. Therefore, reduction on OTTV will slightly dropped air-conditioning cooling load and possibly lowered the usage of electricity. Thus, it will reduce the

Building Energy Index (BEI) of the building.

Building Energy Index (BEI) is the global yearly energy consumption of the entire building divided by the air conditioned floor area. The target of the LEO was 100 kWh/m²/yr, and the reference value is 275 kWh/m²/yr. In the “Guidelines for Energy Efficiency in Buildings-1989” published by the then Ministry of Energy, Telecommunications and Posts (1989), four typical buildings are defined to represent different expected levels of energy use in Malaysia.

- a) The worst case represents buildings that are among the most energy intensive buildings that might be encountered in Malaysia today. BEI = 240 kWh/m²/yr.;
- b) The base case building reflect a typical range of construction and energy use features now prevalent in Malaysian new commercial building construction. BEI = 166 kWh/m²/yr.;
- c) The proposed standard reflects the level of energy efficiency expected to be achieved by the proposed Guidelines. BEI = 136 kWh/m²/yr.;
- d) The good practice represents a combination of energy efficient practice (including daylighting) that surpasses the requirements of the Guidelines proposed. BEI = 98 kWh/m²/yr.

2.0 Concept of OTTV

Overall Thermal Transfer Value (OTTV) is an index for comparing the thermal performance of building. It is a measure tool of the average heat gain into a building through the building envelope. The concept of OTTV is based on assumption that the envelope of the building is completely enclosed. The solar heat gain through the building envelope constitutes a substantial share of cooling load in an air-conditioned buildings. The OTTV aims at achieving the design of building envelope to cut down external heat gain and hence reduce the cooling load of the air-conditioning system. The OTTV consists of three major components such as; conduction through opaque walls, conduction through window glass, and solar radiation through window glass. OTTV of the building envelope for a building, having a total air-conditioned area exceeding 4000m² and above, should not exceed 50 W/m², and the visible transmittance of the daylight fenestration system should not be less than 50%. (MS125, 2007)

Clause 4.5 of MS1525 (2007) stated that the exterior wall and cladding systems should be design to provide an integrated solution for the provision of view, daylight control, passive and active solar energy collection, and moisture management systems while minimizing heat gain.

Clause 5.1 of MS1525 (2007) stated that fundamentally, the building envelope has to block out heat gain into buildings via conduction and radiation. While Clause 3.1 states that the external portions of a building through which thermal energy is transferred; and this thermal transfer is the major factor affecting interior comfort level and energy usage. Therefore, improving OTTV of the building is very important because it will provide thermal comfort and also energy efficiency, thus will establish long term energy saving.

3.0 OTTV Formula

In the OTTV formulation, the following items are not considered:

- a) Internal shading devices, e.g. curtains, blinds;
- b) Solar reflection or shading from adjacent buildings;
- c) Green walls

OTTV formula shall be as follow (MS1525, 2007):

$$\text{OTTV} = [15 \alpha (1-\text{WWR})U_w] + [6(\text{WWR})U_f] + [194 \times \text{CF} \times \text{WWR} \times \text{SC}]$$

α	= Solar absorption (colour of the wall)
WWR	= Window to Wall Ratio
U_w	= U-value of the wall
U_f	= U-value of the window (Refer to glass specification)
CF	= Correction Factor (Table 4 MS1525)
SC	= Shading Coefficient (Table 5, 6 & 7)

Solar heat gain through windows contribute more than 70% thermal transfer into the building

4.0 Ways to Improve OTTV

GBI has identified ways to improve OTTV as stated below:

1. Identify which component contributes the most OTTV. Glazing material always contribute most OTTV to the building;
2. Review Solar Correction Factors (CF) in Table 4 of MS1525. Table 4 specifies CF for the various orientation of fenestration. A fenestration system may consist of glazing material, a shading device and a combination of both;
3. Review glass selection & its Shading Coefficient (SC). To choose glass with lower U-value, but shall not reduce the Visible Light Transmittance (VLT);
4. Review sunshades & Shading Coefficient (SC) in Table 5, 6 and 7 of MS1525. Table 5, 6 and 7 specifies SC of external shading devices (horizontal projections, vertical projections and egg-crate louvres). External shading devices can be proposed or improved especially to the façade which contribute most OTTV;
5. Review Window-to-Wall Ratio (WWR). The WWR can be improved by reducing window area especially to the west façade. Spandrel glass also can be introduced.

Aim of minimum energy efficiency performance is to ensure building envelope to achieve minimum performance to reduce energy consumption in buildings and reducing CO2 emission to the atmosphere. This aim is to encourage high performance glazing such as Low emissivity (Low-e) and solar control glass. Low-e glass can help provide high levels of thermal insulation. To minimize overheating in hot climates and reduce CO2 emissions associated with air-conditioning, solar control performance glass can be proposed.

5.0 Case Study: Ministry of Women Family and Community Development, Lot 4G11, Putrajaya

Office for Ministry of Women Family and Community Development, also known as Lot 4G11 located at Precinct 4 Putrajaya, consists of 38 storeys office block with three levels basement car park. The building specifications for Baseline Building Design are as follows;

- a) External wall colour - white spray paint;
- b) External wall construction- 125mm precast concrete panels, U-value= 0.80;
- c) Glazing- laminated double glazing glass unit 8.76mm thick. (4mm thick body tint-blue green + 0.76 PVB + 4mm thick. Clear with low-E heat strengthened glass); SC= 0.70, U-value= 5.1 & Visible Light Transmittance (VLT)= 0.47

The strategy is to upgrade the building envelope with high performance façade design, without compromising the original architectural appearance of the building.

6.0 Methodology

The calculation of the OTTV will be based on Baseline Design (existing condition of the building envelope), MS1525 Design (mandatory compliance for GBI certification) and Platinum Design (as required by the Government for all government buildings in Putrajaya). In order to reduce the OTTV, two methods have been established. First, reducing the U-value of the glass as shown in Table 1, and second, improving Window to Wall Ratio (WWR) of the building envelope without affecting the original façade of the building as shown in Table 2 and 3. Therefore, 30% of spandrel glass with same appearance with vision glass have been proposed.

Table 1: Proposed Glazing Material for the Building Envelope

Design	Base Line	MS15245	Platinum
Glass Types	Laminated double glazing glass unit	Pilkington Eclipse Advantage™ Arctic Blue monolithic glass#2	Pilkington Eclipse Advantage™ Blue-Green Insulating K glass™ #3
Thickness	8.76mm (4mm Blue-green tint + 0.76 PVB + 4mm Clear with Low E Heat Strengthened)	12mm	28mm
Shading Coefficient	0.7	0.41	0.40

U-value (W/m ² K)	5.1	3.8	1.3
Colour	Blue-green	Arctic Blue	Blue-Green
Visible Light Transmittance, VLT	0.47	0.39	0.47

Table 1 above shows the U-value of the glass have been reduced from 5.1Wm²/k (Baseline Design) to 3.8Wm²/k (MS1525 Design), and further reduce to 1.3Wm²/k (Platinum Design). To maintain the same appearance of the façade, same glass colour and VLT has been proposed for Platinum Design. Source: Zainonabidin (2015)

Table 2: Window to Wall Ratio of South and North Facade

	South Facade			North Facade		
	Baseline	MS1525	Platinum	Baseline	MS1525	Platinum
Total Facade Area	6,332.38 sqm			2,684.55 sqm		
With Shading Devices	2,535.40 sqm		1,774.78 sqm	1,679.49 sqm		1,175.64 sqm
	73.06 sqm		51.14 sqm	52.88 sqm		37.02 sqm
Without Shading Devices	1,380.74 sqm		966.52 sqm	415.02 sqm		290.51 sqm
Total Window Area	3,989.20 sqm		2,792.44 sqm	2,147.39 sqm		1,503.17 sqm
Spandrel Glass	-		1,196.76 sqm	-		644.22 sqm
Window to Wall Ratio (WWR)	0.63		0.44	0.80		0.56

Table 2 above indicates the WWR for South façade have been reduced from 0.63 to 0.44, and WWR for North façade have been reduced from 0.80 to 0.56. Source: Zainonabidin (2015)

Table 3: Window to Wall Ratio of East and West Facade

	East Facade			West Facade		
	Baseline	MS1525	Platinum	Baseline	MS1525	Platinum
Total Facade Area	7,077.16sqm			7,077.16 sqm		
With Shading Devices	1,795.68 sqm		1,256.98 sqm	1,795.68 sqm		1,256.98 sqm
	118.57 sqm		83.00 sqm	118.57 sqm		83.00 sqm
Without Shading Devices	1,306.17 sqm		914.32 sqm	1,306.17 sqm		914.32 sqm
Total Window Area	3,220.42 sqm		2,254.29 sqm	3,220.42 sqm		2,254.29 sqm
Spandrel Glass	-		966.13sqm	-		966.13sqm
Window to Wall Ratio (WWR)	0.46		0.32	0.46		0.32

Table 3 above shows that the WWR for East and West façade have been reduced from 0.46 to 0.32 which is more than 30% of glazing material have been changed to spandrel glass. Source: Zainonabidin (2015)

7.0 Analysis and Discussion

Baseline Building Design

OTTV for Baseline Building Design is 77.43 W/m², which is above minimum OTTV as stated in MS1525. Table 4 shows that OTTV for Baseline Building Design is 77.43 W/m², which is more than mandatory requirements as specified in MS1525.

MS1525 Design

Further improvement on the building envelope, i.e. on glass specification as per Table 1, in order to comply with mandatory requirement for OTTV as stated in MS 1525 (The OTTV for air-conditioned building shall not exceed 50 W/m²).


U-value of the glass has been changed from 5.1 to 3.8, and VLT have been reduced from 0.47 to 0.39. The OTTV base on new glass specification is 48.45 W/m², which is complied with minimum requirement in MS 1525. Table 5 shows that by improving the glass U-value, the OTTV is only 48.45 W/m² and comply with MS1525.

Platinum Design

To achieve OTTV with Platinum Design, the following approach have been made:

- a) Reduce the U-value of the glass from 3.8 to 1.4 as per Table 1;
- b) Reduce total window area by 30%, and replaced with spandrel glass, thus will further reduce the Wall to Window Ratio (WWR) as per Table 2 and 3;

The changes has further reduced the OTTV to 28.43 W/m² as shown in Table 6.

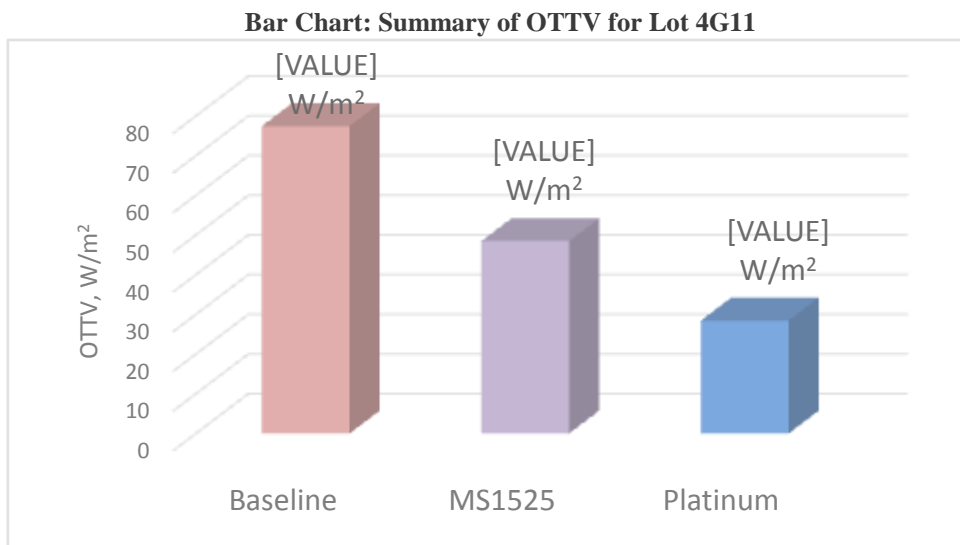

The bar chart above demonstrates that improving glass U-value can reduce 37% of OTTV (comparison between Baseline and MS1525). While, improving glass U-value and WWR can reduce 63% of OTTV (comparison between Baseline and Platinum), and 41% of OTTV (comparison between MS1525 and Platinum). Source: Zainonabidin (2015)

Table 4: OTTV Calculation of Baseline Building Design

OTTV Calculation: Baseline												
	ELEVATION	Façade Area (A)	Window Area	Constant	Solar Absorption Factor (α) - colour of wall *	Window to Wall Ratio (WWR)	(1 - WWR)	U-Value W/m ² k (Uv)	Orientation Correction Factor (CF) - (refer to MS 1525 table 4)	Shading Coeff SC = SC ₁ x SC ₂	Thermal Transfer Value (OTTV)	A x OTTV
HEAT CONDUCTION THROUGH WALLS	South Façade (Front Elevation)	6,332.38	3,989.20	15.00	0.25	0.63	0.37	0.63	n/a	n/a	0.88	5,548.95
	North Façade (Rear Elevation)	2,684.55	2,147.39	15.00	0.25	0.80	0.20	0.63	n/a	n/a	0.47	1,272.06
	East Façade (Left Elevation)	7,077.16	3,220.42	15.00	0.25	0.46	0.54	0.63	n/a	n/a	1.29	9,133.25
	West Façade (Right Elevation)	7,077.16	3,220.42	15.00	0.25	0.46	0.54	0.63	n/a	n/a	1.29	9,133.25
	TOTAL WALL OTTV					15 X α X (1 - WWR) U_w						3.93
HEAT CONDUCTION THROUGH WINDOWS	South Façade (Front Elevation)	6,332.38	3,989.20	6.00	n/a	0.63	n/a	5.10	n/a	n/a	19.28	122,069.52
	North Façade (Rear Elevation)	2,684.55	2,147.39	6.00	n/a	0.80	n/a	5.10	n/a	n/a	24.48	65,710.13
	East Façade (Left Elevation)	7,077.16	3,220.42	6.00	n/a	0.46	n/a	5.10	n/a	n/a	13.92	98,544.85
	West Façade (Right Elevation)	7,077.16	3,220.42	6.00	n/a	0.46	n/a	5.10	n/a	n/a	13.92	98,544.85
	TOTAL WINDOW OTTV					6 x WWR x U_f						71.60
SOLAR HEAT GAIN THROUGH WINDOWS			2,535.40	194.00	n/a	0.40	n/a	n/a	0.92	0.54	38.52	
	South Façade (Front Elevation)	6,332.38	73.06	194.00	n/a	0.01	n/a	n/a	0.92	0.46	0.94	422,344.52
			1,380.74	194.00	n/a	0.22	n/a	n/a	0.92	0.70	27.24	
			1,679.49	194.00	n/a	0.63	n/a	n/a	0.90	0.54	58.88	
	North Façade (Rear Elevation)	2,684.55	52.88	194.00	n/a	0.02	n/a	n/a	0.90	0.46	1.56	212,980.49
			415.02	194.00	n/a	0.15	n/a	n/a	0.90	0.70	18.89	
			1,795.68	194.00	n/a	0.25	n/a	n/a	1.23	0.42	25.43	
	East Façade (Left Elevation)	7,077.16	118.57	194.00	n/a	0.02	n/a	n/a	1.23	0.70	2.80	417,943.79
			1,306.17	194.00	n/a	0.18	n/a	n/a	1.23	0.70	30.83	
			1,795.68	194.00	n/a	0.25	n/a	n/a	0.94	0.46	21.05	
	West Façade (Right Elevation)	7,077.16	118.57	194.00	n/a	0.02	n/a	n/a	0.94	0.70	2.14	330,865.30
		1,306.17	194.00	n/a	0.18	n/a	n/a	0.94	0.70	23.56		
TOTAL SOLAR HEAT GAIN			12,577.43			194 x WWR x CF x SC					251.84	1,384,134.10
OVERALL BUILDING OTTV		23,171.25									77.43	1,794,090.98

Table 4 above analyses OTTV Calculation of Baseline Building Design with the overall value of 77.43. Source: Zainonabidin (2015)

Table 5: OTTV Calculation of MS1525 Design

OTTV Calculation: MS1525												
	ELEVATION	Façade Area (A)	Window Area	Constant	Solar Absorption Factor (α) - colour of wall *	Window to Wall Ratio (WWR)	(1 - WWR)	U-Value W/m ² K (U _w)	Orientation Correction Factor (CF) - (refer to MS 1525 table 4)	Shading Coeff SC = SC ₁ x SC ₂	Thermal Transfer Value (OTTV)	A x OTTV
HEAT CONDUCTION THROUGH WALLS	South Façade (Front Elevation)	6,332.38	3,989.20	15.00	0.25	0.63	0.37	0.63	n/a	n/a	0.88	5,548.95
	North Façade (Rear Elevation)	2,684.55	2,147.39	15.00	0.25	0.80	0.20	0.63	n/a	n/a	0.47	1,272.06
	East Façade (Left Elevation)	7,077.16	3,220.42	15.00	0.25	0.46	0.54	0.63	n/a	n/a	1.29	9,133.25
	West Façade (Right Elevation)	7,077.16	3,220.42	15.00	0.25	0.46	0.54	0.63	n/a	n/a	1.29	9,133.25
	TOTAL WALL OTTV					15 X α X (1 - WWR) U_w						3.93
HEAT CONDUCTION THROUGH WINDOWS	South Façade (Front Elevation)	6,332.38	3,989.20	6.00	n/a	0.63	n/a	3.80	n/a	n/a	14.36	90,953.76
	North Façade (Rear Elevation)	2,684.55	2,147.39	6.00	n/a	0.80	n/a	3.80	n/a	n/a	18.24	48,960.49
	East Façade (Left Elevation)	7,077.16	3,220.42	6.00	n/a	0.46	n/a	3.80	n/a	n/a	10.38	73,425.58
	West Façade (Right Elevation)	7,077.16	3,220.42	6.00	n/a	0.46	n/a	3.80	n/a	n/a	10.38	73,425.58
	TOTAL WINDOW OTTV					6 x WWR x U_f						53.35
SOLAR HEAT GAIN THROUGH WINDOWS			2,535.40	194.00	n/a	0.40	n/a	n/a	0.92	0.32	22.56	
	South Façade (Front Elevation)	6,332.38	73.06	194.00	n/a	0.01	n/a	n/a	0.92	0.27	0.55	247,373.22
			1,380.74	194.00	n/a	0.22	n/a	n/a	0.92	0.41	15.96	
			1,679.49	194.00	n/a	0.63	n/a	n/a	0.90	0.32	34.48	
	North Façade (Rear Elevation)	2,684.55	52.88	194.00	n/a	0.02	n/a	n/a	0.90	0.27	0.92	124,745.71
			415.02	194.00	n/a	0.15	n/a	n/a	0.90	0.41	11.07	
			1,795.68	194.00	n/a	0.25	n/a	n/a	1.23	0.25	14.89	
	East Façade (Left Elevation)	7,077.16	118.57	194.00	n/a	0.02	n/a	n/a	1.23	0.41	1.64	244,795.65
			1,306.17	194.00	n/a	0.18	n/a	n/a	1.23	0.41	18.06	
			1,795.68	194.00	n/a	0.25	n/a	n/a	0.94	0.27	12.33	
	West Façade (Right Elevation)	7,077.16	118.57	194.00	n/a	0.02	n/a	n/a	0.94	0.41	1.25	193,792.54
			1,306.17	194.00	n/a	0.18	n/a	n/a	0.94	0.41	13.80	
	TOTAL SOLAR HEAT GAIN			12,577.43			194 x WWR x CF x SC					147.51
OVERALL BUILDING OTTV		23,171.25									48.45	1,122,560.04

Table 5 above analyses OTTV Calculation of MS1525 Design with the overall value of 48.45. Source: Zainonabidin (2015)

Table 6: OTTV Calculation of Platinum Design

OTTV Calculation: Platinum (Installed Spandrel Glass up to 30%)												
	ELEVATION	Façade Area (A)	Window Area	Constant	Solar Absorption Factor (α) - colour of wall *	Window to Wall Ratio (WWR)	(1 - WWR)	U-Value W/m ² k (Uv)	Orientation Correction Factor (CF) - (refer to MS 1525 table 4)	Shading Coeff SC = SC ₁ x SC ₂	Thermal Transfer Value (OTTV)	A x OTTV
HEAT CONDUCTION THROUGH WALLS	South Façade (Front Elevation)	6,332.38	2,792.44	15.00	0.25	0.44	0.37	0.65	n/a	n/a	0.90	5,694.61
				15.00	0.40		0.19	0.64	n/a	n/a	0.73	4,619.33
	North Façade (Rear Elevation)	2,684.55	1,503.17	15.00	0.25	0.56	0.20	0.65	n/a	n/a	0.49	1,304.96
				15.00	0.40		0.24	0.64	n/a	n/a	0.93	2,487.14
	East Façade (Left Elevation)	7,077.16	2,254.29	15.00	0.25	0.32	0.54	0.65	n/a	n/a	1.31	9,288.55
				15.00	0.40		0.14	0.64	n/a	n/a	0.55	3,863.85
	West Façade (Right Elevation)	7,077.16	2,254.29	15.00	0.25	0.32	0.54	0.65	n/a	n/a	1.31	9,288.55
			15.00	0.40		0.14	0.64	n/a	n/a	0.55	3,863.85	
	TOTAL WALL OTTV					15 X α X (1 - WWR) Uw					6.21	36,546.99
HEAT CONDUCTION THROUGH WINDOWS	South Façade (Front Elevation)	6,332.38	2,792.44	6.00	n/a	0.44	n/a	1.30	n/a	n/a	3.44	21,781.03
	North Façade (Rear Elevation)	2,684.55	1,503.17	6.00	n/a	0.56	n/a	1.30	n/a	n/a	4.37	11,724.75
	East Façade (Left Elevation)	7,077.16	2,254.29	6.00	n/a	0.32	n/a	1.30	n/a	n/a	2.48	17,583.49
	West Façade (Right Elevation)	7,077.16	2,254.29	6.00	n/a	0.32	n/a	1.30	n/a	n/a	2.48	17,583.49
		TOTAL WINDOW OTTV					6 x WWR x Uf					12.78
SOLAR HEAT GAIN THROUGH WINDOWS			1,774.78	194.00	n/a	0.28	n/a	n/a	0.92	0.31	15.41	
	South Façade (Front Elevation)	6,332.38	51.14	194.00	n/a	0.01	n/a	n/a	0.92	0.26	0.37	168,937.81
			966.52	194.00	n/a	0.15	n/a	n/a	0.92	0.40	10.90	
			1,175.64	194.00	n/a	0.44	n/a	n/a	0.90	0.31	23.55	
	North Façade (Rear Elevation)	2,684.55	37.02	194.00	n/a	0.01	n/a	n/a	0.90	0.26	0.63	85,192.19
			290.51	194.00	n/a	0.11	n/a	n/a	0.90	0.40	7.56	
			1,256.98	194.00	n/a	0.18	n/a	n/a	1.23	0.24	10.17	
	East Façade (Left Elevation)	7,077.16	83.00	194.00	n/a	0.01	n/a	n/a	1.23	0.40	1.12	167,177.52
			914.32	194.00	n/a	0.13	n/a	n/a	1.23	0.40	12.33	
			1,256.98	194.00	n/a	0.18	n/a	n/a	0.94	0.26	8.42	
	West Façade (Right Elevation)	7,077.16	83.00	194.00	n/a	0.01	n/a	n/a	0.94	0.40	0.86	132,346.12
			914.32	194.00	n/a	0.13	n/a	n/a	0.94	0.40	9.42	
		TOTAL SOLAR HEAT GAIN		8,804.20			194 x WWR x CF x SC					100.74
OVERALL BUILDING OTTV		23,171.25									28.43	658,873.40

Table 6 above analyses OTTV Calculation of Platinum Design with the overall value of 28.43. Source: Zainonabidin (2015)

8.0 Conclusion

It is evident from this exercise that improving the building envelope, especially on glass specifications and Window to Wall Ratio will improve the Overall Thermal Transfer Value (OTTV) of the building. Improving OTTV means will reduce heat gain into the building and thus will help to minimize usage of air conditioning and electricity during office hour. In general, the study will supports the government's recent move for energy efficiency and GBI certified buildings, especially in Putrajaya.

9.0 References

- American Society of Heating, Refrigerating and Air-Conditioning Engineers (2007), *ANSI/ASHRAE Standard 62.1-2007 Ventilation of Acceptable Indoor Air Quality*;
- Department of Standards Malaysia (2007), *MS1525:2007 Code of Practice on Energy Efficiency and Use of Renewable Energy for Non-Residential Buildings*;
- Green Building Index Sdn. Bhd. (2011), *Non-Residential New Construction (NRNC): Design Reference Guide & Submission Format*;
- Green Building Index Sdn. Bhd. (2011), *Non-Residential Existing Building (NREB): Design Reference Guide & Submission Format*;
- Ibrahim N., Ahmed A.Z. and Sh. Ahmed S. (2004), *Wall Envelopes in Office Buildings: Design Trend and Implications on Cooling Load of Buildings*, Built Environment Journal Vol. 1, University Publication Centre (UPENA);
- Leadership in Energy & Environmental Design (2002), *Green Building Rating System for New Construction & Major Renovations (LEED-NC) Version 2.1*;
- MS1525:2007 (2007) *Code of Practice on Energy Efficiency and Use of Renewable Energy for Non-Residential Buildings (First Revision)*. Department of Standards Malaysia.
- Ministry of Energy, Telecommunications and Posts, Malaysia (December 1989), *Guidelines for Energy Efficiency in Buildings*;
- Pilkington (2010). *Pilkington Glass Handbook 2010*. Pilkington NSG Group Flat Glass Business, St Helens, United Kingdom.
- SaidurR., Hasanuzzaman M., Hasan M.M, & Masjuki H.H. (2009), *Overall Thermal Transfer Value of Residential Buildings in Malaysia*, Journal of Applied Sciences 9(11) 2130-2136;