

METHODOLOGICAL FRAMEWORK IN APPLYING GEOGRAPHIC INFORMATION SYSTEM (GIS) FOR PARKING SPACES DATA

Siti Nurzafira Mohamad Taufik¹, Siti Zaharah Ishak^{2*}, Zaharah Mohd Yusoff³, Mohd Nizar Mohd Jaafar⁴, Sekhar Somenahalli⁵

^{1,2*,3} Malaysia Institute of Transport (MITRANS), Universiti Teknologi MARA (UiTM), 40450 Shah Alam, Selangor, Malaysia

^{2*} School of Civil Engineering, College of Engineering, Universiti Teknologi MARA (UiTM), 40450 Shah Alam, Selangor, Malaysia

³ Faculty of Architecture, Planning and Surveying, Universiti Teknologi MARA (UiTM), Shah Alam 40450, Selangor, Malaysia

⁴ MNJ Teras Sdn. Bhd., Taman Petaling Utama, 46150 Petaling Jaya, Selangor MALAYSIA

⁵ UniSA STEM, University of South Australia, Mawson Lakes Boulevard, Mawson Lakes, Adelaide 5095 Australia

¹z916645@gmail.com, ^{2*} sitiza406@uitm.edu.my, ³ zmy_1208@yahoo.com, ⁴ nizar@mnjteras.com,

⁵ Sekhar.Somenahalli@unisa.edu.au

ABSTRACT

The primary objective of this study is to explore the potential utility of Geographic Information Systems (GIS) in assessing the distribution and availability of parking spaces within urban areas throughout the day. The research focused on the parking facilities within the Majlis Bandaraya Petaling Jaya region in 2022. The dataset encompassed pertinent details such as the geographical coordinates of each parking location, individual parking capacity, the classification of adjacent roadways, and associated pricing information. This comprehensive parking dataset was sourced from the local municipal authority. The investigation entailed correlating parking occupancy rates with factors like parking fees and the time of day. The identification of accessible parking spots and their respective occupancy rates was facilitated through the utilization of a GIS query builder. The Majlis Bandaraya Petaling Jaya effectively employs a computerized geographic information system to manage, process, analyze, and generate geographical and attribute-related information. This system necessitates software, technological infrastructure, databases, procedural frameworks, and human expertise to efficiently manage the accumulated information. Among the diverse applications of GIS, geospatial data analysis is a pivotal component. The findings of this study revealed two significant outcomes: firstly, the conversion of Google Earth's imagery sensing data into a Geographic Information System format was successfully accomplished; and secondly, GIS demonstrated its viability as a tool for comprehensively studying parking lot occupancy across various levels of analysis. The utilization of distribution or mapping maps notably simplifies the tracking of intricate data sets. Therefore, the formulation of distribution maps for parking lot occupancy proves imperative in addressing traffic congestion and related inconveniences.



This is an open access article under the CC BY-SA license
(<https://creativecommons.org/licenses/by-sa/3.0/>).

Employing a GIS-based approach to parking spot identification could also contribute insights into the realms of traffic congestion and pedestrian safety within urban settings.

Keywords: *Availability, Geographical Information System (GIS), Parking Spaces.*

Received for review: 02-10-2022; Accepted: 18-09-2023; Published: 10-10-2023

DOI: 10.24191/mjoc.v8i2.24075

1. Introduction

According to a press release issued on April 16, 2014, by market research agency Nielsen, Malaysia has the third-highest rate of car ownership in the world, with 93 percent of households owning a car. That is to say, only 7 percent of Malaysian households do not own cars. Car parking is a major issue in both developed and developing countries' urban areas. Many cities are suffering from a lack of car parking areas as a result of the rapid increase in car ownership, with an imbalance between parking supply and demand, which can be considered the initial cause of metropolis parking problems.

This imbalance is caused in part by ineffective land use planning and underestimation of space requirements during the early stages of planning. Parking space shortages, high parking fees, and traffic congestion caused by visitors looking for a parking spot are just a few examples of common parking issues. In recent years, planners and researchers have focused on parking to solve current traffic problems, particularly in congested urban areas. For the study area, Irbid-Jordan city, where curb parking is common, parking lots have recently been used to alleviate congestion, aid in the reduction of pedestrian accidents, and encourage pedestrians to change cultural behaviors by walking on streets rather than sidewalks (Riggs, 2014; Huang and Hsieh, 2022). Furthermore, because on-street parking is in short supply, drivers are willing to park in parking lots for safety reasons.

The geographic information system (GIS) is a computer-based tool for visualizing, mapping, and analyzing earthly phenomena. GIS is a technological tool for analyzing spatial data. It is the science of spatial and attribute data analysis that makes GIS an effective tool for locating public parking locations (Watener *et al.*, 2013; Yaacob *et al.*, 2016 and Obaidat, 2018). As a result of GIS's usefulness, many private and government agencies in Malaysia are using and implementing it on a regular basis.

The aim of this paper is to provide a methodology framework using GIS to provide information about parking space availability, especially in Central Business District (CBD) areas, in order to set an efficient parking solution or smart parking monitoring systems for sustainable transportation in the smart cities environment. The availability of parking areas data provided to the public at the locality can resolve the issue of traffic congestion, lost time and difficulties of finding parking spaces at CBD and thus can reduce carbon emission. The smart parking monitoring provided in the locality will achieve the quality of 'citizen's life, which considers the aspects of planning, management, technology and environment (Khairuzzaman *et al.*, 2020; Ahmad *et al.*, 2014). The objectives of this paper are to extract the parking area from imagery sensing Google Earth, to gather data on the type of parking areas from the available database provided by local authorities and to produce the distribution map of parking availability by categories - area by units, hectares and types.

2. Literature Review

2.1 Parking

The parking system is a branch of engineering that falls under the purview of Traffic Engineers. In order to determine whether current parking needs are met, a study of parking is crucial. Parking is defined as a location or storage area for stationary vehicles, as well as the act of

stopping and disengaging a vehicle and leaving it unoccupied. It is convenient for motorists to park or store a vehicle in order to conduct their own business. The scarcity of space in urban areas has increased the demand for parking spaces, particularly in business districts. The lack of off-street parking in most urban areas, combined with inefficient traffic management, has resulted in parking issues, particularly in cities. The pattern of parking supply in our towns and cities has been evolving in recent years as parking demand has increased. This has been influenced from the start by the public and private organizations involved in providing parking infrastructure. It is important to remember the basic types of parking and the extent to which local governments have control over them. When considering parking supply, Rye and Kylin (2014) made the distinction between on-street and off-street parking, as shown in Table 1.

Table 1. Parking type and sector controlling and supplying the parking area.

Location	On-Street Parking	Off-Street Parking
Use	Public	Private, Public
Owned	Public	Private, Public
Operated	Public or Private	Private, Public
Type	Free, Priced, Permit, Duration Control	Free, Priced, Priced, Free, Priced

2.2 On-Street Parking

In Europe, all on-street parking is publicly owned and provided by local governments, often under the general guidance and legal framework established by the central government. Local governments decide which restrictions should be imposed on specific streets within the framework of central government guidelines, taking into account national and local pressures for road safety, traffic flow, public transport provision and movement, the functioning of the local economy, residents' needs, and access to emergency services.

2.3 Off-Street Parking

The majority of parking spaces will be located off-street in and around average medium- to large-sized cities. Most local authorities will require a certain amount of off-street parking to be built for the users of all new developments in their area. Additionally, all are likely to provide some public off-street parking, sometimes at a cost, for all users. However, the construction of a new off-street parking can be extremely expensive.

2.4 Availability of Parking Space and Management

Parking management encompasses a wide range of policies and programs that result in more efficient use of parking resources while also providing significant economic, social, and environmental benefits. Although individual parking management strategies frequently have minor effects, their combined effects are significant. A cost-effective, integrated parking management program can frequently save money on parking requirements by 20-40% while improving user convenience and contributing to the achievement of additional planning goals. According to Glaab (2017), the best way to reduce driving is by charging people directly to drive and to cope with the price and demand. In this context, parking spaces should be considered real estate either in parking lots or as curb parking. The location of the parking area will determine the value. A space with many people, jobs, and amenities, such as a parking space in the heart of the city, is more valuable than one with fewer people, jobs, and amenities, such as a street space in a small town or a city space in the middle of the night. As a result, if parking were priced like most commodities, its cost would vary depending on both time and

location. It would be more expensive in large cities than in small towns, in business districts than in neighborhoods, and at midday rather than at midnight.

If on-street parking is kept low enough to always be close to full, adding more off-street parking spaces will not necessarily reduce cruising for parking. If on-street parking is less expensive than off-street parking, there is always an incentive to cruise for street parking as long as the value of expected cruising time is less than the difference in parking prices. Parking on the street is typically underpriced, either because there is no fee or because the meter price is too low.

Off-street parking facility owners are unlikely to set prices so low that customers are frequently turned away. According to Moura and de Silva (2019), predicting and analyzing parking space availability is a broad area of research with numerous opportunities to employ various technologies and methodologies. Over the last few years, there have been numerous scientific types of research and applications in this area. Existing practices, potential solutions and applications in the field of predicting parking space availability will emerge by Tuan Hassan and Masrom (2022).

2.5 Distribution of Parking Availability Area

Shared parking is a good way to solve the parking problem. However, it is obvious that the scattered shared parking spaces in residential communities cannot provide enough parking spaces at any time. Due to the affordable price of small city cars and free or nominal charges for parking, most people prefer to travel by private cars rather than public transport. Nowadays, new parking development concepts like multi-level parking systems provide ample space as an off-street parking scheme with subsidized parking fees. Those areas generally have a higher demand for on-street parking due to a lack of off-street parking spaces.

Cruising for parking occurs due to a lack of available parking spaces for parkers and a high demand for on-street parking in such areas. It has a negative impact on traffic in most major cities around the world, including India. According to Parmar *et al.*, (2020), the average volume of traffic related to parking during peak hours can reach 30% to 50% of total traffic. People who own a vehicle need a space for parking. As the number of vehicles grows, the need for space will increase. Behrendt (1940) mentioned that due to this high growth rate, parking has become an integrated component of buildings as well as roadways. Hence, car parking is an issue of significance both at the local as well as at the strategic level of planning. The contribution towards traffic congestion and violations, accidents and injuries, and wastage of time and money as well shows that parking problems arise mainly due to people wanting to park exactly in front of the door of their destination.

On-street parking proves to be hazardous for through traffic and is also one of the most influencing factors for the delay. The high number of on-street parking spaces along the major roads in urban areas affects traffic operations, especially at every peak hour. In this case, many road users decide to park their cars at illegal parking spaces because of the tendency of people to park their cars near the destination regardless of legal or illegal parking. Illegal parking seems to be avoided as the number of vehicles increases. The distribution of parking availability areas is important to road users to produce effective road users in terms of using parking spaces.

3. Methodology

3.1 GIS Tools and System

A geographic Information System (GIS) is a computerized information management system used for spatial and attribute information management, processing, analysis, and production. To manage information, GIS requires software, hardware, databases, procedures, and the skills of a person. The information is managed through a combination of information system

operations that include planning, observation, data collection, management, and analysis to produce information that can be used in decision-making. GIS can be used in a variety of fields, including science, engineering, construction, local governments, social services, national defence, and the military. Students are increasingly interested in GIS courses offered at the undergraduate and graduate levels in universities and colleges.

According to Lim (2022), the geographic information system (GIS) is a computer-based tool for visualizing, mapping, and analyzing earthly phenomena. GIS is a technological tool for analyzing spatial data. Geographic Information System (GIS), as a science of spatial and attribute data analysis, is an effective tool for locating the best location for public parking. Because GIS is such a useful tool, many private companies and government agencies in Malaysia have begun to use and implement it in their daily operations.

The software of ArcGIS is a multipurpose GIS software programme created by ESRI. It is a large and well-integrated software platform that may be used to create functional GIS. There are four essential software components of ArcGIS, which is a geographic information model (GIM) that simulates aspects of the real world. These include components for storing and managing geographic data in files and databases, a set of pre-built applications for generating, editing, manipulating, mapping, analysing, and disseminating geographic data, and web services (data and functions) for networked software clients. Mobile devices, laptops, desktop computers, and servers can all run portions of the ArcGIS software system. ArcGIS Desktop is a fundamental component for GIS professionals to produce, examine, organise, and distribute geographic data so decision-makers can make well-informed choices. The ArcGIS Desktop can manage data, make maps, and conduct geographical analysis with it. To find spatial patterns, trends, and obscure correlations, ArcGIS Desktop can ingest data in a variety of formats and employ robust analytical tools and workflows. ArcGIS Pro, the powerful single desktop GIS application, is a feature-packed software developed with enhancements and ideas from the ArcGIS Pro user community. ArcGIS Pro supports data visualization; advanced analysis; and authoritative data maintenance in 2D, 3D, and 4D. It supports data sharing across a suite of ArcGIS products, such as ArcGIS Online and ArcGIS Enterprise, and enables users to work across the ArcGIS system through Web GIS. Discover the full spectrum of tools and capabilities within ArcGIS Pro today. This software can transform data into maps and actionable information. The software of ArcGIS Desktop has a multi-functional programme that can integrate data from multiple processes. The combination of data from various sources and formats can be supported by this software. Other than that, this software also can edit and analyse the data.

3.2 Intelligent transportation systems and parking management: Implementation potential in a Malaysian city

A detailed map with accurate parking area positions and additional parking information, such as type of parking, cost or parking restrictions, is required to create an ITS for urban parking. This information is not currently available in any database above the level of individual municipalities. A highly scalable process that relies solely on existing and widely disseminated technologies rather than exhaustive manual data collection methods is required for quickly, cost-effective, and reliably mapping parking areas. Remote sensing imagery and query databases from GIS were identified as appropriate data sources. GIS data will be used to query the database and extract the aggregate parking area information from remote sensing imagery.

According to Giannopoulos *et al.* (2017), the GIS database that is formed is capable of incorporating data that describes the existing situation and, furthermore, data that can be used to establish propositions for solving the identified problems. A substantial amount of primary and secondary geometric and descriptive information regarding the nature and characteristics of the area, which affect parking, was extremely valuable. More specifically, a unique card for every main building of the area was completed by a fieldwork survey, including a series of attributes that refer to the built environment and the existing floor and upper land

use. Moreover, attributes regarding the street network and parking supply per block were added. The use of a comprehensive GIS environment not only contributes to improving the quality of research but also offers the possibility of continuously updated information and monitoring of the factors that influence the development of parking” policies’ implementation. Figure 1 illustrates the parking distribution map digitiser that can be displayed using GIS (Giannopoulos et al., 2017).

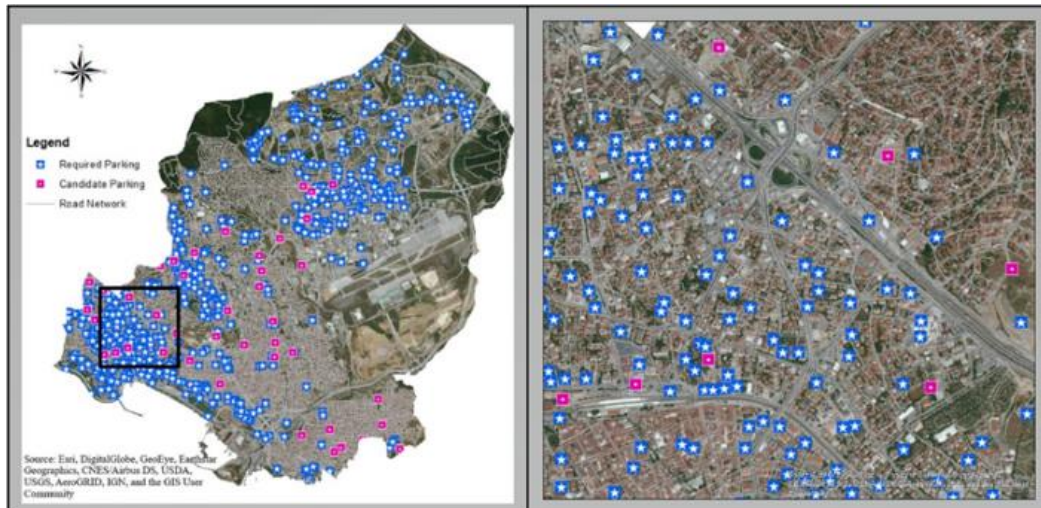


Figure 1. Illustration of parking distribution map digitizer.

3.3 Data Collection

Data collection will be based on secondary data collected from the local authority. The procedure of collecting, measuring and analyzing accurate insights for research using standard validated techniques. The data requirement consists of secondary data. The data that has been collected is to profile all the parking distribution in the MBPJ area. The following variables were included in the availability of parking lots study:

- location of the parking area
- types of parking areas
- status of the parking area
- the total area of parking lots

The profiling of parking space detection under Majlis Bandaraya Petaling Jaya using computerized information management system for information management, processing, analysis and production of information related to spatial and attribute, which is known as a Geographical Information System (GIS). The use of a comprehensive GIS environment not only contributes to improving the quality of research but also offers the possibility of continuously updated information and monitoring of the factors that influence development of parking “policies’ implementation.

3.4 Methodological Concept Results

The profiling of parking space detention under Majlis Bandaraya Petaling Jaya using computerized information management system for information management, processing, analysis and production of information related to spatial and attribute which is known as Geographical Information System (GIS). GIS requires software, hardware, databases, procedures and skills from a person to manage the information. GIS can be used for various applications including geospatial data. The information is controlled using a combination of information systems operations involving planning, observation, collection, management and analysis of data to produce information that can be used in the decision-making process.

In this study, the mapping processes are divided into five major phases, which are interrelated from one phase to another. In order to clearly understand the mapping process for the availability of parking areas will describe all the phases in detail. The description of mapping process follows five (5) phases:

- Phase One: Imagery Sensing from Google Earth for Digitizing the availability of parking area.
- Phase Two: Identification of variable database inside the spatial and attribute table in GIS
- Phase Three: Extracting the parking database from the attribute table and reclassifying it into two categories.
- Phase Four: Export and Add the Query table for additional data.
- Phase Five: Processing the distribution of general suitable parking sites map - Availability of parking area.

The overall mapping process in the methodology framework is illustrated in Figure 2.

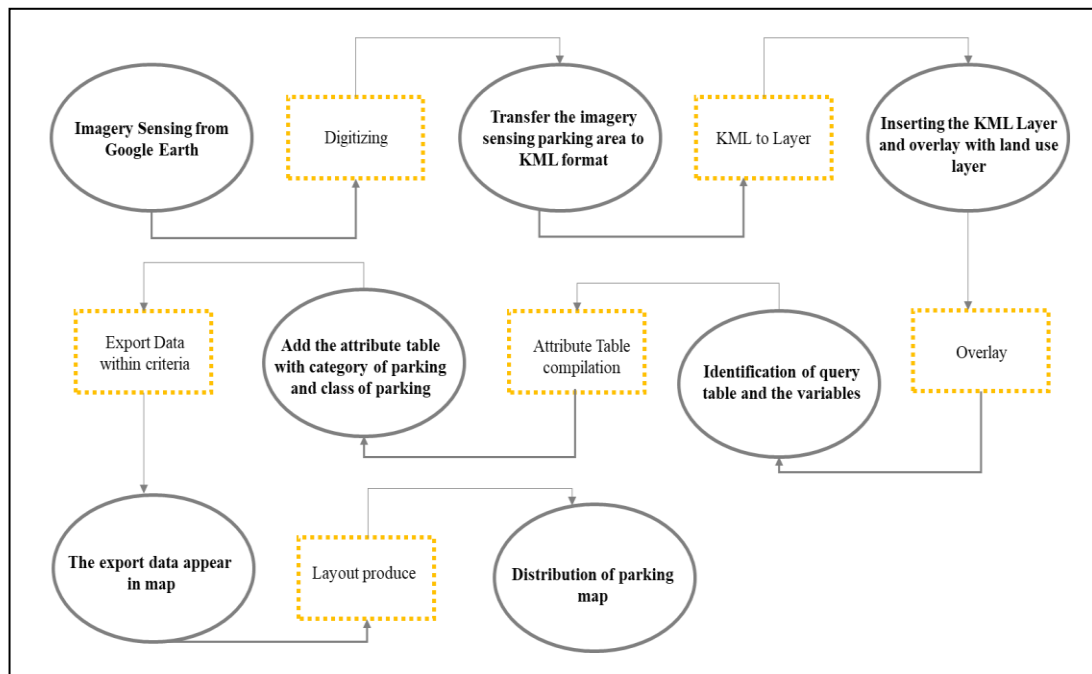


Figure 2. The overall mapping processes in the methodology framework.

3.5 GIS Layers

Layers in ArcGIS are collections of geographic data. Layers point to a data source, and if the data is spatially interpreted by ArcGIS Pro, the data's properties and attributes specify how the layer draws on a map, scene, or layout. A layer's data is represented by points, lines, shapes (polygons), or surfaces. The data is then visualized using symbols, text, graphics, and images. Most layers are one of the above types. Because GIS data varies in organization and complexity, there are many more types. For example, a group layer refers to a collection of layers. Some other common types of layers as provided in Table 2. In order to determine the number of existing parking lots in the study will be used spatial and attribute data to analyse the existing parking lots. The determination of the desired number of new parking lots can start with the modeling process.

Table 2. Common Type of Layers.

No	Type of Layer	Layer Justification
1	Query Layer	Uses SQL queries to access and reference spatial and nonspatial database tables
2	Selection Layer	References a subset of features from an existing layer
3	Subtype Layer	Symbolized a subtype in a feature class or feature service as part of subtype group layer
4	Voxel Layer	A type of 3D grid-based layer for displaying spatiotemporal data
5	Graphics Layer	Represents geographic objects but does no reference a dataset

4. Results and Discussion

The results are analysed and presented according to the five (5) mapping processes.

Phase One: Imagery Sensing from Google Earth for Digitizing the availability of parking area.

The purpose of the first phase is mainly to define the availability area for parking lots in the study area. In the first phase of mapping, the number of existing parking areas should be identified. The number of existing parking sites helps to reduce the size of the study area for potential parking sites. The process of this phase consists of several steps. The results of the first phase will produce the available area for parking lots and presented in form of the imagery sensing from google earth as depicted in Figure 3.

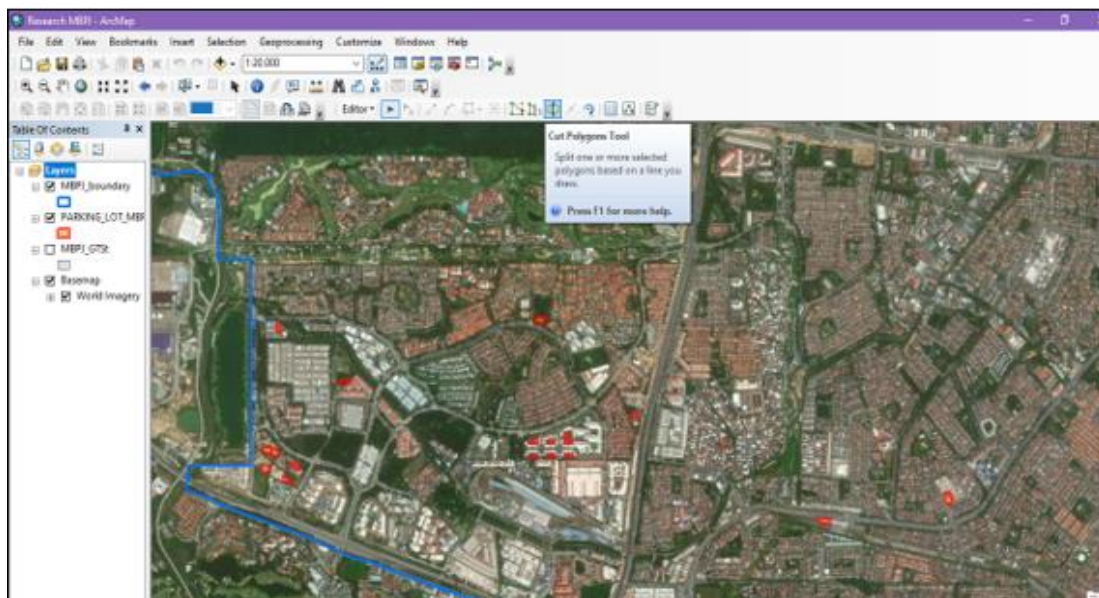


Figure 3. Imagery Sensing from Google Earth process.

Phase Two: Identification of variable database inside the spatial and attribute table in GIS

The following GIS layers were developed in order to identify the attributes, entities and relationships of each variable, as tabulated in Table 3. Table 3 shows the collected database and the available parking spaces as a function from the selected data from the attribute table.

Table 3. Developed GIS layers.

Bil	Variables	Variable Justification
1	Lot ID	The identification number of the lot for selected lot area
2	Guna Tanah 1	The identification of land use 1 st classes according to their types from GIS guideline
3	Guna Tanah 2	The identification of land use 2 nd classes according to their types from GIS guideline
4	Guna Tanah 3	The identification of land use 3 rd classes according to their types from GIS guideline
5	Luas_h	The area of parking lot in hectare
6	Daerah_ID	The unique ID for district identification
7	PBT_ID	The unique ID for local authority identification
8	Jenis_TLK	Identification of category of parking area (On-street parking and Off-street parking)
9	Kategori_TLK	Identification of parking status (In-Building or Off Building)

Phase Three: Extracting the parking database from the attribute table and reclassifying it into two categories.

In this phase, different criteria are considered in order to assess the future needs of parking facilities. This is due to different factors contributing to the need of the following two types of parking site (refer to Figure 4), either On-Street Parking or Off-Street Parking.

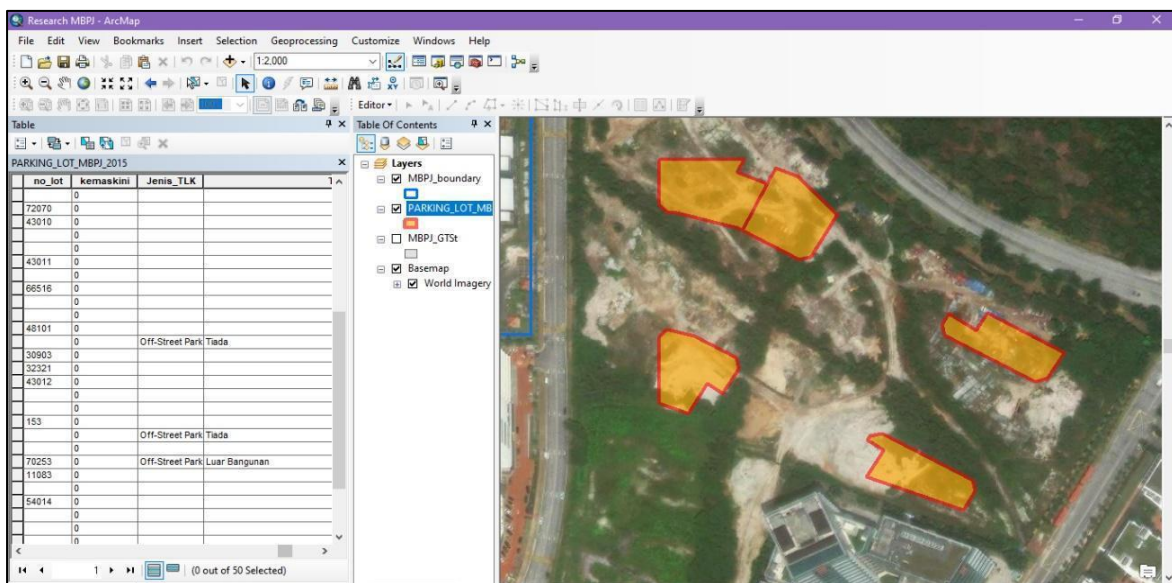


Figure 4. Extracted of the parking database followed by their categories.

Phase Four: Export and Add the Query table for additional data (class and category TLK).

In Phase Four, the selected criteria for exporting process will be made by choosing the data from the attribute table. The process will include two selected criteria in attribute table with command of “Jenis_TLK” = ‘Off-Street’ Parking’ as classified by the MBPJ_Parking Lot layer (as displayed in Figure 5).

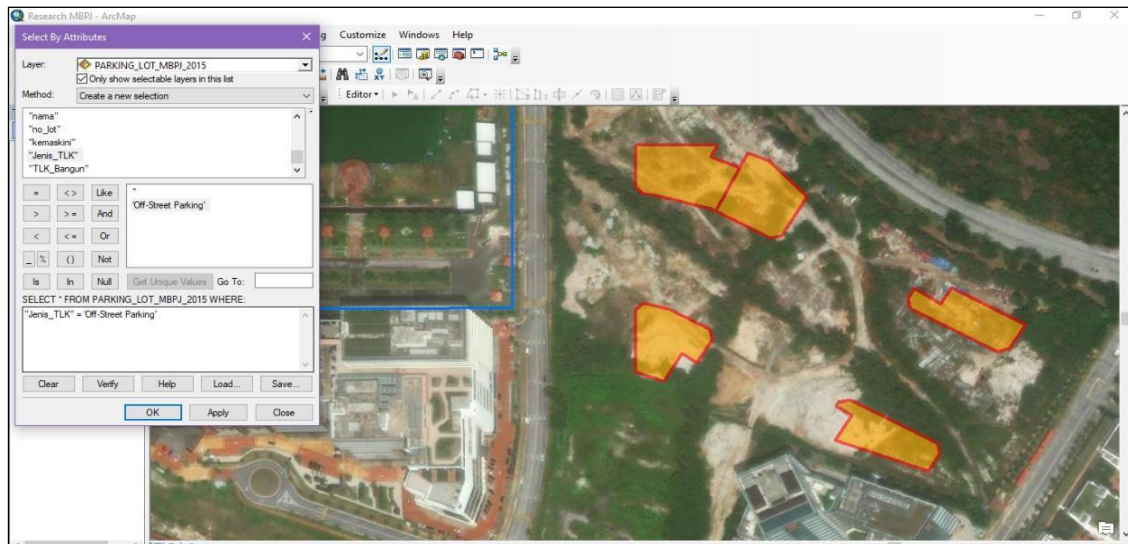


Figure 5. The selected criteria for exporting process.

Phase Five: Processing the distribution of general, suitable parking sites map - Availability of parking area in Smart Cities Concept.

In Phase Five, the process of understanding different types of land use will be done in order to improve the urban conditions. Land can be used to create parking facilities in a more appropriate manner as land dimensions play important role in determining the best location for parking facilities, considering the number of cars, the level of commuting, and parking along the route centers of generation. If the land size is less than the limit for creating and constructing a parking facility or if the parking capacity is insufficient in accommodating the target capacity, the intended location is removed from the list of possible locations. As shown in Figure 6, the distribution map shows the categories and types of parking lots available. As shown in Figure 6, the distribution map shows the categories and types of parking lots available.

Smart parking monitoring systems provide car owners with information on available parking spaces. The management of the parking system has been improved for searching the available car parking spaces. The smart parking monitoring systems will indicate the available car park spaces using a monitor being placed at the entry point of the car park. Through image processing and CCTVs, this research detects the movement of cars in the parking system based on their registration numbers. Hence, the implementation of smart parking monitoring system using GIS is proposed, as the smart parking monitoring system can help to categorize and include the following types of parking:

- On-Street Parking
- Off-Street Parking
- Others

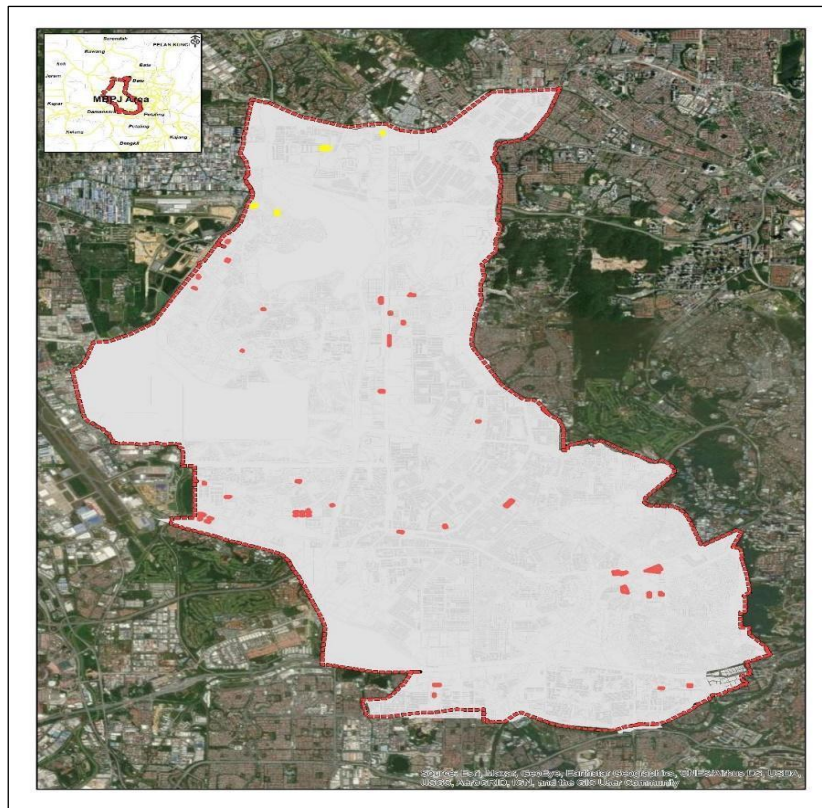


Figure 6. Distribution Map of Parking Availability by Categories.

5. Discussion and Conclusion

The issues pertaining to congestion that leads from dense population and higher number of registered vehicles at CBD may always become critical if no proper planning is taken by now. The issues can be tackled by ensuring comprehensive data is available for better planning. Congestion in the CBD, particularly when the public has difficulty finding the location to park their vehicles at their destination, becomes critical if they are not given advance information before starting their journey. In providing this information, comprehensive data is required by the Local Authority. Parking data should be readily available, including locations and their categories, occupancy (peak and off-peak times), etc. Detailed data can be very much easier to be monitored in the mapping or distribution maps. The definition of distribution maps for parking lot occupancy is critical in terms of convenience and traffic congestion. As a result of the developed GIS-based scheme for locating parking lots in urban areas, it might be possible to gain insight into traffic congestion issues as well as pedestrian safety issues. The maps created with this scheme could be updated and used for planning purposes and can be easily fit into smart parking monitoring systems dashboard. Similarly, the layout design of the needed parking facility produced by this process (Rashindra *et al.*, 2023), can provide numerous benefits in terms of optimization of parking lot usage (occupancy vs time), safe cost and time, better planning for the city. To support smart parking monitoring systems, this study prepares the necessary platform and information using GIS tools.

Acknowledgement

The authors would like to thank the Malaysia Institute of Transport (MITRANS) for financial support for this paper submission. This paper is part of MSc study under MITRANS, UiTM and contributing to MBPJ Seed Fund 2022.

Funding

The author(s) received funding from MBPJ Grand SEED UITM 2022.

Author Contribution

Siti Nurzafira Binti Mohamad Taufik drafted the manuscript with the close supervision of the corresponding author, while the other authors provided critical feedback during revisions. In addition to providing input for the model, all authors provided input for the computational framework, as well as analyzing the data.

Conflict of Interests

The authors have no conflicts of interest to declare.

References

- Arcgis.com. A quick tour of map layers—Help | ArcGIS for Desktop. (2016). <https://desktop.arcgis.com/en/arcmap/10.3/map/working-with-layers/a-quick-tour-of-map-layers.htm>
- Ahmad, H., Hamzah, P., Yasin, Z. M., & Shariff, S. S. R. (2014, January). Location routing inventory problem with transshipment (LRIP-T). In *Proceedings of the 2014 International Conference on Industrial Engineering and Operations Management* (pp. 1595-1605).
- Behrendt, W. C. (1940). Off-street parking: A city planning problem. *J. Land & Pub. Util. Econ.*, 16, 464.
- Giannopoulos, M., Vavatsikos, A. P., Lykostratis, K., & Roukouni, A. (2017). Using GIS to analyse parking attributes in urban areas. *Plurimondi*, (17).
- Glaab, J. (2017). Extracting Parking Areas from Remote Sensing Imagery and Spatiotemporal Traffic Data. DigitalCommons@URI. Available at: <https://digitalcommons.uri.edu/theses/1056/>
- Huang, Y. H., & Hsieh, C. H. (2022). A decision support system for available parking slots on the roadsides in urban areas. *Expert Systems with Applications*, 205, 117668.
- Khairuzzaman, M. G., Othman, S., Adnan, R., & Ismail, N. (2020). Analyzing user behaviour and page views based on visitor traffic in kolej universiti poly-tech mara website using google analytic. *Malaysian Journal of Computing (MJoC)*, 5(1), 446-455.

- Lim, A. (2022, June 13). *More cars than people in Malaysia at present? Not likely, as 33 mil figure is total registrations since 1946*. Paul Tan's Automotive News. <https://paultan.org/2022/06/13/more-cars-than-people-in-malaysia-at-present-not-likely-as-33-mil-figure-is-total-registrations-since-1946/>
- Moura, F., & de Silva, J. D. A. (2019). Smart cities: Definitions, evolution of the concept and examples of initiatives. Industry, innovation and infrastructure. *Encyclopedia of the UN Sustainable Development*. Cham: Springer.
- Obaidat, M. T. (2008). GIS potential in parking Lots studies. *ICCBT-E-(16)*, 193, 202.
- Parmar, J., Das, P., & Dave, S. M. (2020). Study on demand and characteristics of parking system in urban areas: A review. *Journal of Traffic and Transportation Engineering (English Edition)*, 7(1), 111-124.
- Rashindra, A. D., Zulkarnaen, G. S., Pahala, Y., & Saidah, D. (2023). Application and design of production room layout with 5S-ARC method to reduce waste (case study on rubber industry production). *Malaysian Journal of Computing (MJoC)*, 8(1), 1414-1426.
- Riggs, W. (2014). Dealing with parking issues on an urban campus: The case of UC Berkeley. *Case Studies on Transport Policy*, 2(3), 168-176.
- Rye, T., & Koglin, T. (2014). *Parking management*. In *Parking issues and policies*. Emerald Group Publishing Limited.
- Tuan Hassan, T. M. H., & Masrom, M. (2022). Determining optimal transportation allocation using linear programming methods. *Malaysian Journal of Computing (MJoC)*, 7(2), 1082-1099.
- Watene, G., Musiega, D., & Ndegwa, C. (2013). A GIS Based Parking Management and Dissemination System. *International Journal of Science and Research*, 2, 2319–7064.
- Ya'acob, N., Azize, A. M., & Alam, N. M. R. N. Z. (2016). Parking system using Geographic Information System (GIS). *2016 IEEE Conference on Systems, Process and Control (ICSPC)*.